
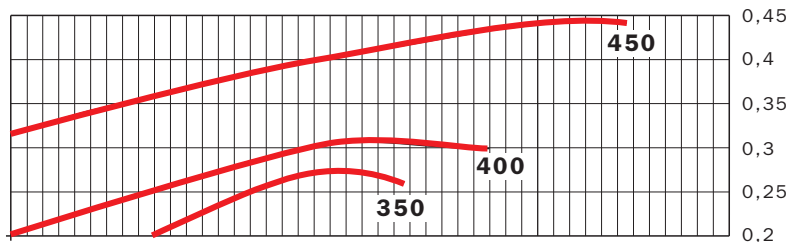


	A	B	C	D	E	F	G	H	Kg
Niper 1 350	405	262	204	250	231	158	40	40	5,1
Niper 2 400	405	262	204	250	231	158	40	40/50	5,1
Niper 2 450	415	262	204	250	231	158	40	40/50	5,8

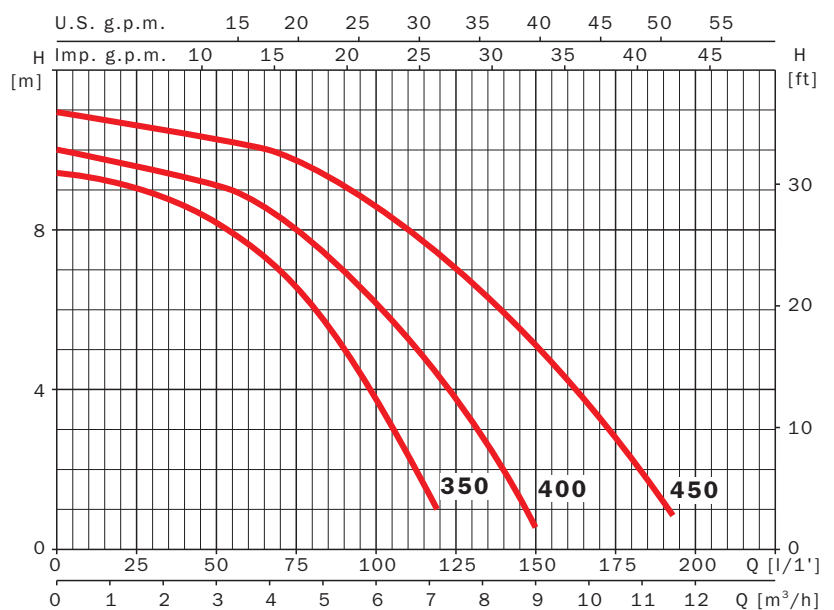

Curvas de funcionamiento a 2900 r.p.m.
 Performance curves at 2900 r.p.m.

230 V 50 Hz	230/400 V 50 Hz	A			P1 (kW)		kW	HP	μF	l/1' m³/h	25	50	75	100	125	150	175	190
		1~ 230 V	3~ 230 V	3~ 400 V	1~	3~					1,5	3	4,5	6	7,5	9	10,5	11,4
Niper 1 350 M		1,34			0,27		0,18	0,25	6		9,1	8,2	6,6	3,7				
Niper 2 400 M		1,53			0,32		0,18	0,25	6		9,6	9,1	8	6,1	3,8	0,6		
Niper 2 450 M		1,97			0,43		0,25	0,33	12		10,6	10,3	9,8	8,5	6,9	5,1	2,8	1,2